

WEAVERLINE



Operator's Manual

Model 46 Mulch Bagger

Weaverline LLC. 180 Bootjack Rd.

Narvon PA 17555

Safety Instructions

**ALWAYS LOCK SWITCH OFF BEFORE
PERFORMING ANY SERVICE WORK!**

**NEVER ENTER THE MACHINE WITHOUT
LOCKING THE SWITCH OFF!**

Always lock switch off before leaving the operators position.

Never attempt to unclog the machine with the power switch on.

Never reach into the bagging attachment with the power switch on.

Always empty the machine before attempting to move it.

Always operate machine on a level surface.

Be sure to block wheels before unloading the machine.

Make sure everyone is clear of the machine before unlocking the power switch.


Always lock power switch off before opening the drive access shield.

Never operate the machine without all shields and warning decals in place.

Always disconnect power supply before working on any electrical components.

Operating Instructions

1. Place bags in filling position under discharge hopper.
2. Move feed rate lever to the (1) position.
3. Move the loading baffle lever to the (Load) position.

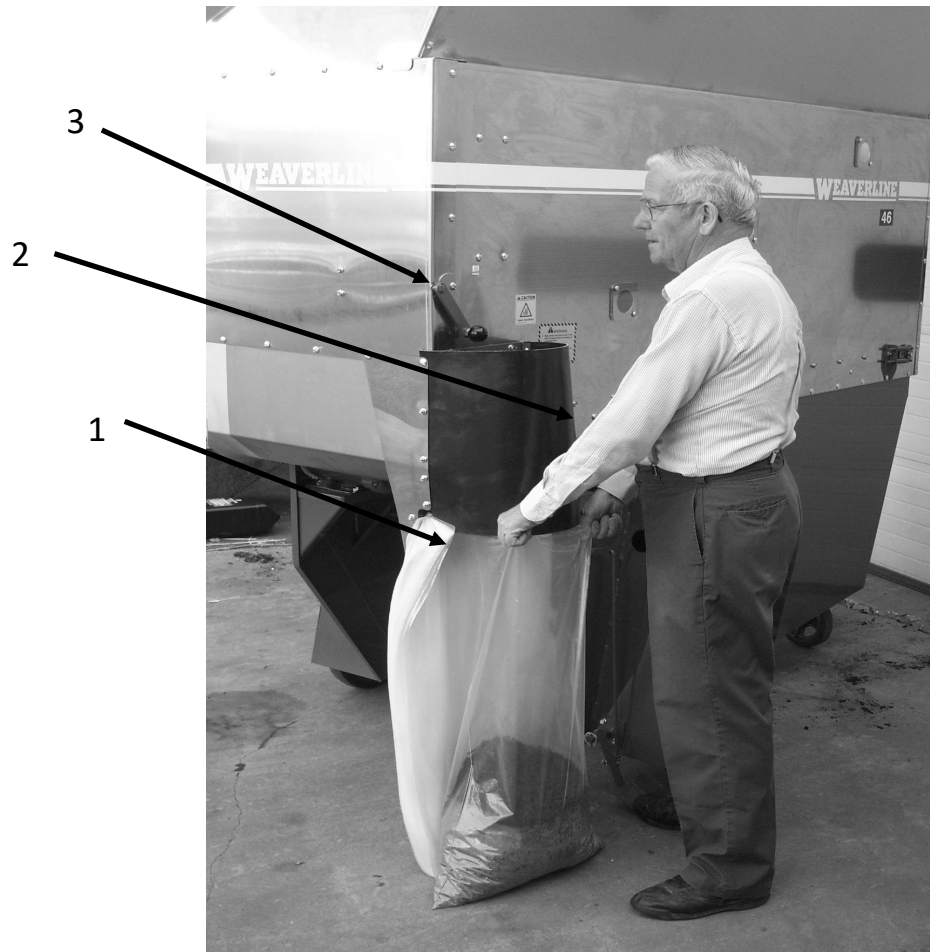

Fill bagger with mulch. In situations where the mulch is wet or dense, much better feeding is obtained by not filling the bagger extension all the way. Connect the electric cord to a power supply. Remove lock at power switch.

Turn power switch on.

Pull bag forward under the discharge hopper.

Activate unloading mechanism by depressing pedal.

After lower beaters clear out, move loading baffle arm to the (Beaters) position. Then adjust the feed rate with the feed rate lever.

If someone else is loading the machine while you are running it, you do not have to move the loading baffle to load position. However, make sure that they load to the rear of the bagger.

Maintenance

Each of the rear wheels can be greased occasionally. Once a month should be sufficient in most cases.

Check all chains and belts daily.

Check tension of conveyor chain weekly. Overall spring length should be maintained at 2 1/2 inches.

Roller chains should be oiled weekly with a heavy oil.

Clean out bagger completely before storage.

Store unit inside when not in use.

Parts and Service is available on these machines. If there is no dealer in your area please contact:

Weaverline LLC, 180 Bootjack Rd, Narvon PA 17555

Phone: 717-445-6724 Email: info@weaverline.com